




Intelligent Sensing Anywhere

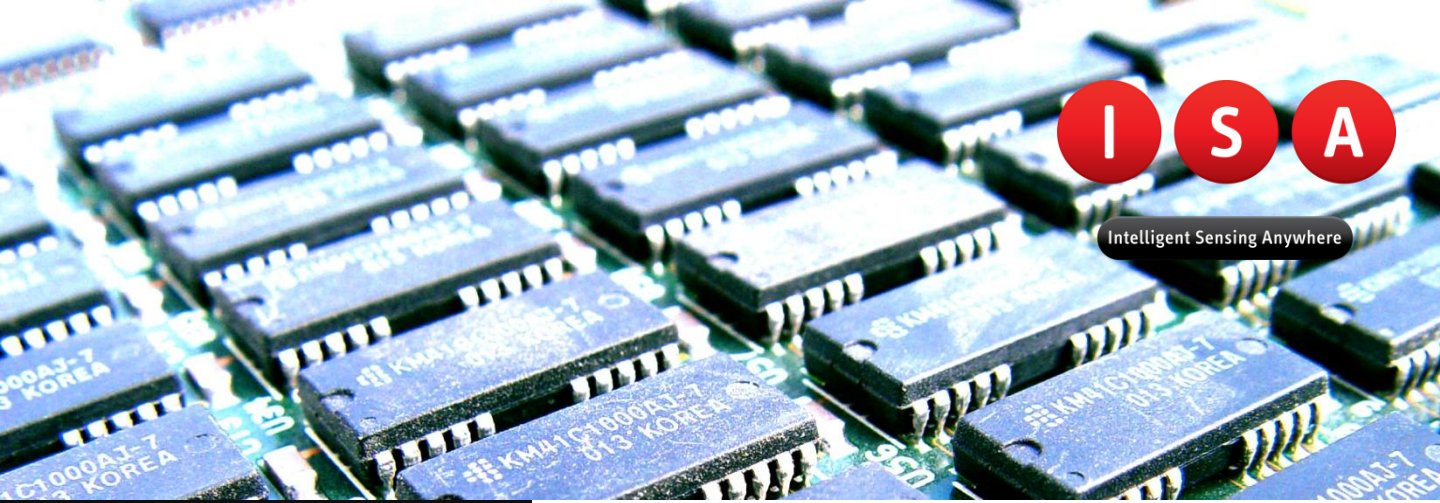

Features

- ISM (Instrumental, Scientific and Medical) 868MHz Band Operation
- Fast Frequency Hopping Capability
- High Bit Rate up to 115,2 kbps
- Easy access to the AT command interface through an application software
- USB V2.0 Compliant Serial Interface Engine
- Low Speed (1.5Mb/s) and Full Speed (12Mb/s) Compatible USB Serial Interface Engine
- On-Board Voltage Regulator: Dongle entirely powered from the USB Bus
- On-Board Microchip's PIC18F66J50 Microcontroller
- No need to develop USB drivers or RF design experience or expertise

Radio USB Dongle

The Radio USB Dongle, by incorporating the Integration IA4421 Universal ISM Band FSK Transceiver, supports a wide range of applications operating on the unlicensed 868MHz ISM that requires FCC or ETSI conformance.

The Radio USB Dongle provides an easy way of integrating Proprietary Protocols into personal computers, gateways or bridge devices. This solution is ideal to be used for the establishment of networks in which the dongle may be configured to act as the coordinator, router or a simple end device.





Intelligent Sensing Anywhere

Radio USB Dongle

sales@isasensing.com
www.isalabs.com

Applications:

Home security and alarm
Remote control
Telemetry
Process Access and Building Controls
Home automation
Home appliances interconnections
Automated meter reading
Automated meter reading
Industrial automation
Wireless sensors
Remote data logging
Remote telemetry
Personal Area Network
PC peripherals

Application Example

The Radio USB Dongle enables the replacement of serial links used for example for the connection of sensors to computers especially for monitoring purposes. Applications where cable installation and maintenance may be difficult can certainly benefit from the use of the Radio USB Dongle. Data is directly transferred to the computer through the Dongle.

Radio Specification

- Frequency Band: 868MHz ISM Band
- Antenna: external, SMA connector
- Output Power: selectable in 3dB steps from -16dBm up to 5 dBm
- Sensitivity: -110 dBm Typical Receiver Sensitivity

Physical Specification

- Dimensions:
L6,39mm × W2,54mm × H1,27mm
(Including USB plug and excluding external antenna)
- Weight: < 30g

Software Specification

- USB Driver Support for Windows 98/2000/XP/Vista

Operating Range

- Operating Temperature: -10°C to 65°C



Product in conformity with the ETSI 300386 norms; EN 55022 and EN 61000, according to the requirements of the Directive EMC 89/336/CEE, altered by Directives 92/31/CEE and 93/68/CEE.

ISA UK&Ireland
Level One, Liosban Business Park
Galway City
Phone: +353 (0)91 782 186
Fax: +353 (0)1 481 185 0

ISA France
32 Rue Marcel Paul,
93290 Tremblay-en-France
Phone: +33 (0)1 41 52 11 01
Fax: +30 (0)1 41 52 11 11

ISA Spain
PCM - Parque Tecnológico de Madrid
28760 Tres Cantos, Madrid
Phone: +34 648 746 761

ISA Portugal
Estádio Cidade de Coimbra, 92
3030-320 Coimbra
Phone: +351 239 791 090
Fax: +351 239 791 099